

AS-106W/B

Techni+
Contact

PROLOGUE

Satellite type speaker with 6.5" diameter woofer. Designed for surface mount on wall or ceiling with 180 adjustable angle. Ideal for installation where speaker system has to be installed on surface. Compatible with 70v distribution network. Four different power settings in 70v. Can also be used in 8 ohms. Woofer and dome tweeter. Very good frequency response. Strong ABS construction. Commercial grade. Can be installed inside or outside. Humidity resistant. Possibility of using a different design type bracket. Removable Euroblock block. Exceptional quality. Easy installation.

Specifications

Mounting hardware included


System type	Surface Speaker 6.25"
Impedance	7.2 ohm
Sensitivity (1w/1m)	86.4dB
Frequency Response(-10dB)	20Hz~20kHz
Max program power	80W
Max continuous power, RMS	50W
Tap selector	5-position switch with transformer bypass
Low-Frequency voice coil	25.5mm
Crossover Frequency	2.5kHz
Network Type: Low pass	12dB
Network Type: High Pass	12dB
Enclosure Material	ABS
Grille	Aluminum
Inputs	4-pins connector
Colors	Black
Height	305mm
Diameter	204mm
Weight	4.3kg
Shipping weight	20.3kg
Packaging	2PRS
Included Accessories	Bracket
CE:	No
ROHS:	Approved
Transformer tapings	8 Ohms, 70V or 100V: 2W/4W/7.5W/15W



Available in 5", 6" and 8" in black or white

Graphs and Plots

Frequency Response

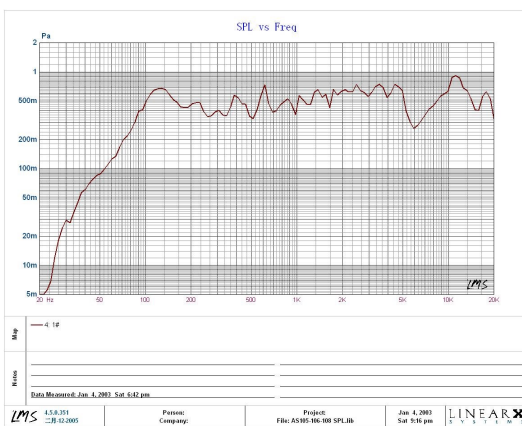

Impedance/Phase

