

AS-108W/B

Techni
Contact

PROLOGUE

Satellite type speaker. Woofer 8" diameter. Designed for surface mount on wall or ceiling. Ideal for installation where material has to be installed on surface. Compatible with 70v distribution network or 8 ohms. Four different power settings in 70v and 180 degree adjustable. Woofer and dome tweeter. Very good frequency response. Strong ABS construction. Commercial grade. Can be installed inside or outside. Humidity resistant. Brackets are included. Removable connection block. Available in white or black.

Specifications

Mounting hardware included


System type	Surface Speaker 8"
Impedance	6 ohm
Sensitivity (1w/1m)	87dB
Frequency Response(-10dB)	20Hz~20kHz
Max program power	80W
Max continuous power, RMS	70W
Tap selector	5-position switch with transformer bypass
Low-Frequency voice coil	30.5mm
Crossover Frequency	2.5kHz
Network Type: Low pass	12dB
Network Type: High Pass	12dB
Enclosure Material	ABS
Grille	Aluminum
Inputs	4-pins connector
Colors	Black
Height	410mm
Diameter	275mm
Weight	6.9kg
Shipping weight	16.7kg
Packaging	1PRS
Included Accessories	Bracket
CE:	No
ROHS:	Approved
Transformer tapings	8 Ohms, 70V or 100V: 2W/4W/7.5W/15W



Available in 5", 6" and 8" in black or white

Graphs and Plots

Frequency Response

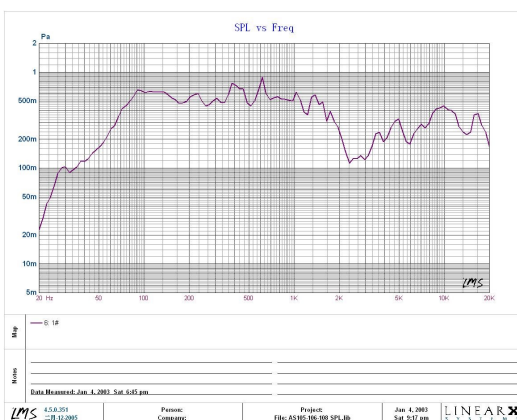

Impedance/Phase

