

AS-22

In-ceiling type 6.5" speaker with excellent frequency response.
80hm, 2 pieces.

Specifications


Mounting hardware included

System type	6.5"
Impedance	7.5 ohm
Sensitivity (1w/1m)	86dB
Frequency Response(-10dB)	60Hz~20kHz
Max program power	80W
Max continuous power, RMS	30W
Tap selector	N/A
Low-Frequency voice coil	25.5mm
Crossover Frequency	2.3kHz
Network Type: Low pass	12dB
Network Type: High Pass	6dB
Enclosure Material	ABS
Grille	Steel
Inputs	Push terminals
Colors	White
Height	76mm
Diameter	195mm
Weight	1.25kg
Shipping weight	6.9kg
Packaging	2PRS
Included Accessories	Manual, grille puller
CE:	No
ROHS:	Approved
Transformer tapings	N/A


Graphs and Plots



Optional tile bridge: AR-62

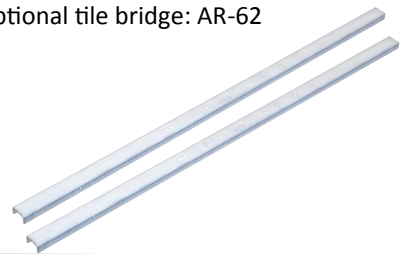

Frequency Response

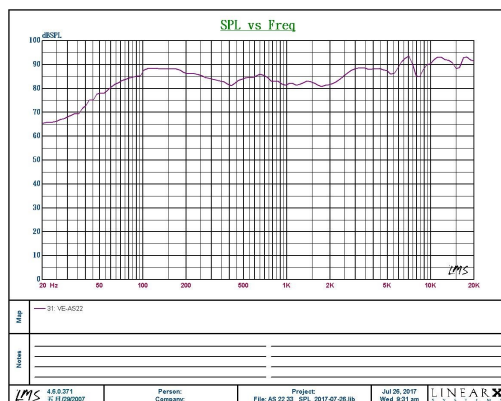

Impedance/Phase

