

AS-24

Techni
Contact

PROLOGUE

In-ceiling type 8" speaker with excellent frequency response. Separate speaker and tweeter for better results. Can be installed in a humid environment. Exceptional quality. Easy to install.


Specifications

System type	Ceiling Speaker 8"
Impedance	8 ohm
Sensitivity (1w/1m)	89dB
Frequency Response(-10dB)	60Hz~20kHz
Max program power	100W
Max continuous power, RMS	50W
Tap selector	N/A
Low-Frequency voice coil	25.4mm
Crossover Frequency	6kHz
Network Type: Low pass	N/A
Network Type: High Pass	-6dB
Enclosure Material	Butyl Rubber
Grille	Steel
Inputs	Terminals
Colors	White
Height	97mm
Diameter	284mm
Weight	1.54kg
Shipping weight	3.7kg
Packaging	2PRS
Included Accessories	Manual, Cut-out plate
CE:	No
ROHS:	Approved
Transformer tapings	N/A



Graphs and Plots

Frequency Response

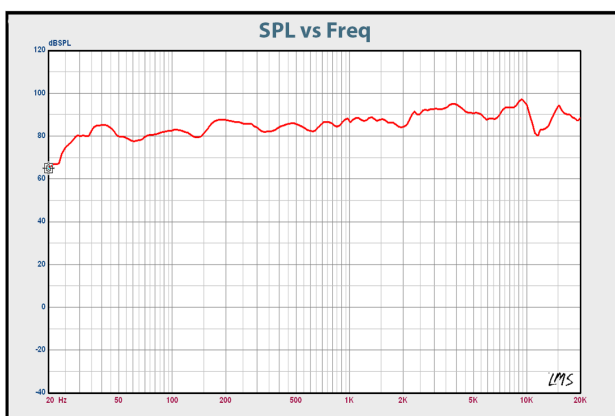

Impedance / Phase

