



AS-32

In ceiling type 6.5" speaker boasts a very thin grille held with magnets. The AS-32 has a modern design that makes the speaker almost disappear. Excellent frequency response. Separate speaker and tweeter for better results with adjustable eyeball tweeter. Can be installed in a humid environment. Exceptional quality. Spring loaded gold plated terminals.

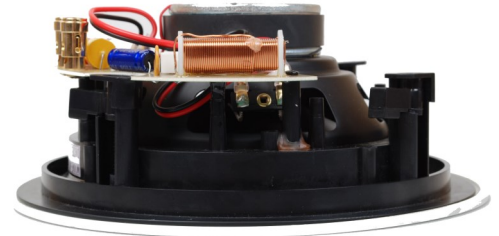

Optional tile bridge: AR-62

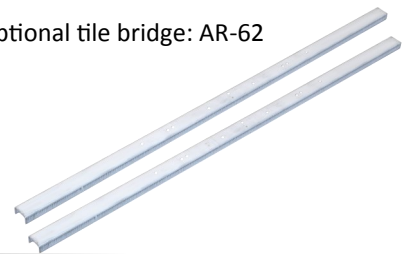


Specifications

Mounting hardware included

System type	Ceiling Speaker 6.5"
Impedance	6 ohm
Sensitivity (1w/1m)	86dB
Frequency Response(-10dB)	60Hz~20kHz
Max program power	100W
Max continuous power, RMS	30W
Tap selector	N/A
Low-Frequency voice coil	25.5mm
Crossover Frequency	8kHz
Network Type: Low pass	12dB
Network Type: High Pass	12dB
Enclosure Material	ABS
Grille	Steel
Inputs	Push terminals
Colors	Black
Height	85mm
Diameter	235mm
Weight	1.3kg
Shipping weight	7.7kg
Packaging	2PRS
Included Accessories	Manual, grille puller
CE:	No
ROHS:	Approved
Transformer tapings	N/A

Graphs and Plots

Frequency Response

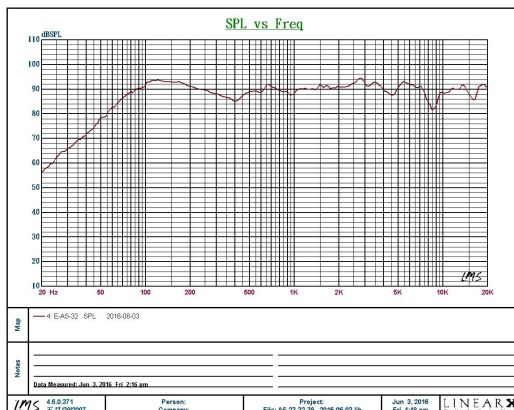

Impedance/Phase

