

# PL-P60W/B

Techni  
Contact

PROLOGUE

Two-way pendant speaker. Ideal for situations where sound has to be brought up to an appropriate SPL. Will allow compressive language announcements with intelligibility together with excellent background music. Remarkable sound quality considering the speaker size. Attractive design. ABS solid construction. 70v. and 8 ohms compatibility. Four different volume settings on the 70v. input. Double steel harness for maximum security (supplied). Removable connection block for maximum flexibility during installation.


## Specifications

System type:	6.5 inch,
Impedance:	8 ohm
Sensitivity (1w/1m):	90 Db
Frequency Response(-10 dB):	45Hz-20 KHz
Max program power:	160W
Max continuous power,RMS:	80W
Tap selector:	Six-position rotary switch with transformer by-
Low-Frequency Voice Coil:	30mm(1.2 inch)
Crossover Frequency:	4.0 kHz
Network Type: Low Pass	12 dB per octave, 2nd order
Network Type: High Pass	12 dB per octave, 2nd order
Enclosure Material:	Injection molded ABS
Grille:	Steel with powder-coat finish
Inputs:	Four-pin,Euroblock for individual or daisy chain connection
Colors:	Black or white (paintable)
Height:	365mm
Diameter:	Φ308mm
Weight:	4.5kgs
Shipping Weight:	5.5kgs
Packaging:	one per box
Included Accessories:	Hanging hardware, Euroblock connector
CE:	Approved
ROHS:	Approved
Transformer tapings:	70V:32-16-8-4-2W-1W & 8 ohms 100V:32-16-8-4W-2W & 8 ohms


## Graphs and Plots



Included Accessories:  
Cable lengths is 38 inches.



Frequency Response

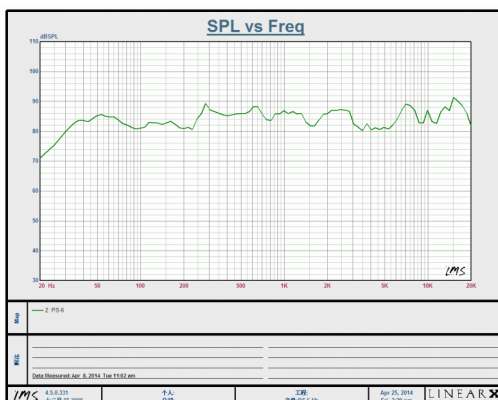

Impedance/Phase

