


## SA-6120S

### Desktop Mixer Power Amplifier

120w rms mono paging amplifier, 70v and 8 ohms outputs, 4 microphone inputs, AUX input, telephone input, 4 zones output with switch and volume

- 4 balanced XLR inputs/mic and AUX option and switchable 24 Vdc phantom power
- One auxiliary RCA stereo input,
- One PRE OUT, One MAIN IN. Mic 1 with soft mute priority feature activated on Input 1
- Slave outputs for "music on hold" function. 4 zones output with volume control and switches.
- 600 ohm telephone paging input
- Treble and bass controls
- LED VU-meter

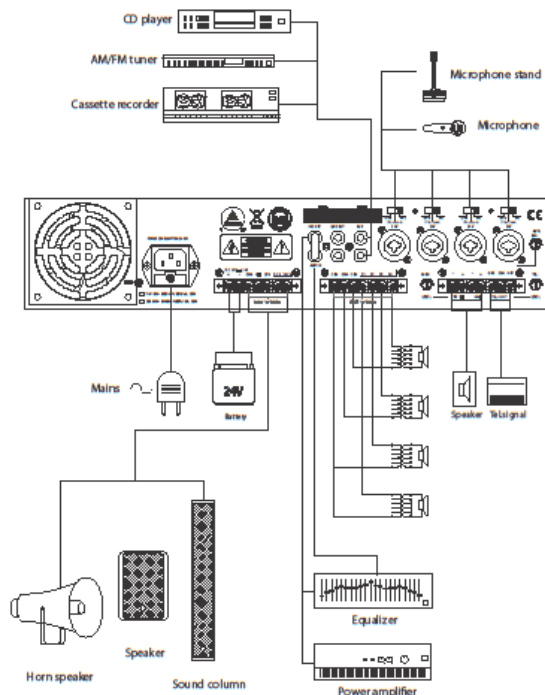

AC input	120v. 60Hz
RMS output	120 watts
Frequency response	80Hz-16kHz ( 3dB)
T.H.D.	≤ 1%
S/N Ratio	Microphone ≥65dB Phantom ≥65dB Line input ≥75dB AUX input ≥80 dB
Power consumption	110-120v AC, 50/60Hz 285-600 watts. DC 24v: 161-312 watts
Input/Sensitivity	Mic : -52dBV balanced Phantom : -52dBV / 24V unbalanced Line input : -10dBV unbalanced TEL IN : -10dBV balanced Aux input : -6dBV unbalanced AMP in : 0dBV unbalanced
Output voltage	COM , 4Ω , 25V , 70V , 100V
Zone out	Z1 Z4 : 100V
Dimensions(WxDxH)	420 330 88mm
Weight /Poids	12 kg