

Satellite type speaker. Woofer 8" diameter. Designed for surface mount on wall. Ideal for installation where material has to be installed on surface. Compatible with 70v distribution network or 8 ohms. Four different power settings in 70v and 180 degree adjustable. Woofer and dome tweeter. Very good frequency response. Strong ABS construction. Commercial grade. Can be installed inside or outside. Humidity resistant. Brackets are included. Removable connection block. Available in white or black. Not recommended for ceiling installations.

SPECIFICATIONS :

Mounting hardware included


System type:	Surface Speaker 8"
Impedance:	6 ohm
Sensitivity (1w/1m):	87dB
Frequency Response(-10dB):	20Hz~20kHz
Max program power:	80W
Max continuous power, RMS:	70W
Tap selector:	5-position switch with transformer bypass
Low-Frequency voice coil:	30.5mm
Crossover Frequency:	2.5kHz
Network Type: Low pass:	12dB
Network Type: High Pass:	12dB
Enclosure Material:	ABS
Grille:	Aluminum
Inputs:	4-pins connector
Colors:	Black
Height:	410mm
Diameter:	275mm
Weight:	6.9kg
Shipping weight:	16.7kg
Packaging:	1 PRS
Included Accessories:	Bracket
CE:	No
ROHS:	Approved
Transformer tapings:	8 Ohms, 70V or 100V: 2W/4W/7.5W/15W



Available in 5", 6" and 8" in black or white

Graphs and Plots

Frequency Response

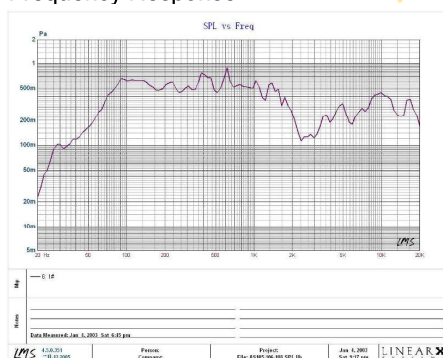

Impedance/Phase

