

In-ceiling type 6.5" speaker with excellent frequency response.8Ohm, 2 pieces.

SPECIFICATIONS :

Mounting hardware included

System type:	6.5"
Impedance:	7.5 ohm
Sensitivity (1w/1m):	86dB
Frequency Response(-10dB):	60Hz~20kHz
Max program power:	80W
Max continuous power, RMS:	30W
Tap selector:	N/A
Low-Frequency voice coil:	25.5mm
Crossover Frequency:	2.3kHz
Network Type: Low pass:	12dB
Network Type: High Pass:	6dB
Enclosure Material:	ABS
Grille:	Steel
Inputs:	Push terminals
Colors:	White
Height:	76mm
Diameter:	195mm
Weight:	1.25kg
Shipping weight:	6.9kg
Packaging:	2PRS
Included Accessories:	Manual, grille puller
CE:	No
ROHS:	Approved
Transformer tapings:	N/A




Optional tile bridge : AR-62



Graphs and Plots

Frequency Response

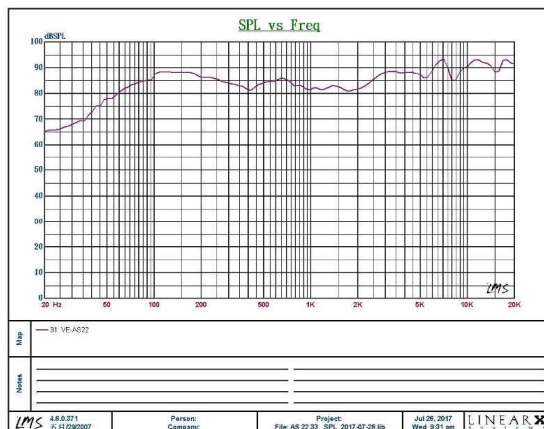

Impedance/Phase

