

Commercial ceiling speaker. 8" woofer with whizzer cone. Comes complete with grille, back box, transformer and connecting block. Can be used with 70v network or 8 ohms applications. Four power settings for 70v. All metal construction with back can for fire rated installations. Strong screw type connecting block for maximum flexibility. Provisions for harness installation. Ideal for large commercial applications. Paint finish and color meets standard ceiling tiles. Easy to install.


SPECIFICATIONS :

Mounting hardware included

System type:	8 inch
Impedance:	8 ohm
Sensitivity (1w/1m):	92 Db
Frequency Response(-10dB):	87Hz-18KHz
Max program power:	20W
Max continuous power, RMS:	10W
Tap selector:	Four-power input transformer bypass
Low-Frequency voice coil:	20.4mm(0.8 inch)
Crossover Frequency:	/
Network Type: Low pass:	/
Network Type: High Pass:	/
Pass Enclosure Material:	Iron stamping forming
Grille:	Iron with powder-coat finish
Inputs:	Voltage input
Colors:	White
Height:	80mm
Diameter:	Φ268mm
Weight:	1.2 kgs
Shipping weight:	1.4 kgs
Packaging:	One per box
Included Accessories:	/
CE:	Approved
ROHS:	Approved
Transformer tapplings:	70V:10-5-2.5-1.25W




Optional tile bridge: AR-62

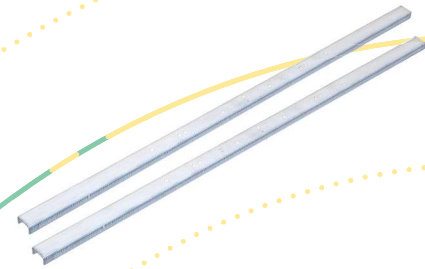

Graphs and Plots

Frequency Response

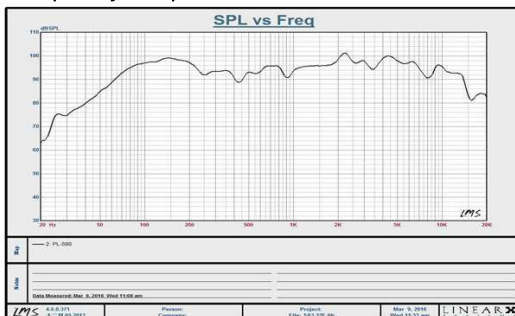

Impedance/Phase

