



TECHNI 
CONTACT

PROFESSIONALS
IN AV/IT
EQUIPMENT

Commercial
audio
2022

It's all about connection.

Our mission is to be your trusted partner, committed to simplifying human interaction and communication.

Our vision is to be the go-to resource for service in the professional AV market in Canada.

PROLOGUE

Complete commercial Solutions

The Prologue Commercial Audio line offers uncompromising quality sound solutions for a large range of commercial applications, such as education, boardrooms, large corporate facilities, hotels, bars, restaurants, retail outlets, leisure centres, sports arenas, theme parks, visitor centres, heritage buildings and Houses of Worship.



Table of contents

SPEACKERS	4
Surface mount	4
In-ceiling speakers	6
Others	11
Accessories	12
Replacement parts	13
In-wall wires	14
Surface wires	15
VOLUME CONTROLS	16
AMPLIFIERS	18
Product specification	18
Others	21
MICROPHONES	23
Product specification	23
Accessories	25
Cables	26
AUDIO INSTALLATION	28

Speakers

SURFACE MOUNT



Features

- Designed for multiple applications in commercial or industrial location
- Weather resistant
- Solid bracket for wall or ceiling mounting
- Built-in transformers allows for use in 8 ohm or 70 V network
- Available in black or white finish
- Sold as a pair

AS-105B/W

5" Surface mount full range Speakers

Power handling:	40 Watts RMS, 80 W peak
Frequency response:	80 Hz – 20 kHz, +/- 10dB
70 V power allocation:	2 W, 4 W, 7.5 W or 15 W
Magnet weight:	10 oz.
Woofer:	5.25" Polypropylene mica cone rubber edge
Tweeter:	1" Titanium dome with neodymium magnet
Housing:	ABS injection molded enclosure
Connection type:	Removable screw connectors
Dimensions:	6.9" x 10.8" x 6.5" (WHD)
Weight:	7 pounds (3.2kg)

AS-106B/W

6" Surface mount full range Speakers

Power handling:	50 Watts RMS, 100 watts peak
Frequency response:	90 Hz – 22 kHz, +/- 10 dB
70 V power allocation:	5 W, 10 W, 25 W or 50 W
Magnet weight:	10 oz.
Woofer:	6.5" Polypropylene mica cone rubber edge woofer
Tweeter:	1" Titanium dome with 4.2 oz. neodymium magnet
Housing:	ABS injection molded enclosure
Connection type:	Removable screw connectors
Dimensions:	8" x 12.5" x 7.6" (WHD)
Weight:	9.5 pounds (4.3kg)

AS-108B/W

8" Surface mount full range Speakers

Power handling:	70 Watts RMS, 140 watts peak
Frequency response:	70 Hz – 20 kHz, +/- 10 dB
70 V power allocation:	5 W, 10 W, 25 W or 25 W
Magnet weight:	20 oz.
Woofer:	8" Injection cone rubber edge woofer
Tweeter:	1" Titanium dome tweeter with 5.3 oz. neodymium magnet
Housing:	ABS injection molded enclosure
Connection type:	Removable screw connectors
Dimensions:	11" x 16.5" x 10" (WHD)
Weight:	15.25 lbs (6.9kg)

Speakers

SURFACE MOUNT



AR-21 / AR-21CG

8" Full range ceiling speaker with whizzer cone



Power Handling:	10 Watts RMS
Frequency response:	50 Hz - 18 kHz
Sensitivity:	90 dB
Impedance:	7.6 Ω
Features:	A very competitive commercial ceiling speaker 70 V transformer with different taps: 0.625, 1.25, 2.5, 5, and 10 watts ROHS approved Designed for ceiling mount with or without railing Rails not included (AR-62) AR-21CG includes circular grille

AS-22

6.5" Flush Mount Ceiling Speakers,
8 ohms



Power handling:	120 Watts, 60 watts RMS
Frequency response:	60 Hz - 20 KHz
Sensitivity:	86 dB
Magnet weight:	10 oz.
Woofer:	6.5" (16.5cm) Polypropylene and mica cone with 1" (2.54cm) Kapton coil former
Tweeter:	0.7" (1.78cm) Ferrofluid tweeter with neodymium magnet
Housing:	Butyl rubber surround
Connection type:	Spring loaded speaker wire jacks for solid connection
Features:	2 per box Easy to install Heavy duty construction Frame may be painted to complement décor Humidity resistant
Dimensions:	8.5" x 8.5" x 3.3" (21.6cm x 21.6cm x 8.4cm) (WHD)

Speakers



IN-CEILING SPEAKERS

AS-24

8" Ceiling Speakers, 8 ohms



Power handling:	50 Watts, 100 watts RMS
Frequency response:	60 Hz – 20 KHz
Sensitivity:	89 dB
Magnet weight:	18 oz.
Woofer:	8" (20.3cm) Polypropylene
Tweeter:	0.5" (1.27cm) Mylar Dome
Housing:	Butyl rubber surround
Features:	Magnetic Grill Slim Bezel
Dimensions:	11.2" x 11.2" x 3.8" (28.45cm x 28.45cm x 9.65cm) (WHD)

AS-30

3" 2-Way Ceiling Speakers, 8 ohms



Power handling:	80 Watts RMS, 140 watts peak power
Frequency response:	130 Hz – 20 kHz
Sensitivity:	90 dB
Impedance :	8 Ω
Woofer:	3" (7.62cm) Polypropylene, 3" (7.62cm) Kevlar woven cone
Tweeter:	0.5" (1.27cm) Mylar dome tweeter in coaxial arrangement
Features:	Very low profile design Speaker grille thickness only 1/8" (3mm) Easy to install Heavy duty construction
Dimensions:	4.57" x 4.57" x 2.28" (11.6cm x 11.6cm x 5.8cm) (WHD)

Speakers



IN-CEILING SPEAKERS

AS-32

6.5" Round Ceiling Speakers, 8 ohms



Power handling:	50Watts, 100 watts RMS
Frequency range:	60 Hz – 20 KHz
Sensitivity:	89 dB
Magnet weight:	10oz
Woofer:	6.5" (16.5cm) woofer, KSV voice coil
Tweeter:	19 mm silk dome, with neodymium magnet, 360° swivel
Housing:	Polypropylene cone with butyl surround
Connection type:	Spring loaded speaker wire jackets for solid connection
Crossover:	12 dB woofer and tweeter, PTC protector
Features:	Very low profile design Speaker grille thickness only 1/8" (3mm) Easy to install Heavy duty construction Magnetic grille may be painted to complement décor Humidity resistant 2 per box
Dimensions:	9.25" x 9.25" x 3.5" (25.27cm x 25.27cm x 8.9cm) (WHD)

AS-33

8" Round Ceiling Speakers, 6 ohms



Power handling:	40 Watts, 100 watts RMS
Frequency range:	50 Hz – 20 KHz
Sensitivity:	87 dB
Magnet weight:	10oz
Woofer:	8" (20.3cm) woofer, KSV voice coil
Tweeter:	1" (25 mm) silk dome, with neodymium magnet, 360° swivel
Housing:	Polypropylene cone with butyl surround
Connection type:	Spring loaded gold plated push terminals
Crossover:	12 dB woofer and tweeter, PTC protector
Features:	Very low profile design Speaker grille thickness only 1/8" (3mm) Easy to install Heavy duty construction Magnetic grille may be painted to complement décor Humidity resistant 2 per box
Dimensions:	11" x 11" x 3.75" (27.94cm x 27.94cm x 9.53cm) (WHD)

Speakers

IN-CEILING SPEAKERS



AS-38

8" Stereo Ceiling Speakers, 8 ohms



Power handling:	40 Watts RMS, 85 watts peak power
Frequency range:	60 Hz – 20 KHz
Sensitivity:	88 dB
Magnet weight:	14.7 oz
Woofer:	8" (20.3cm) woofer with 1" (2.54cm) Kapton voice coil
Tweeter:	Two 1" (2.54cm) ferrofluid pivoting tweeters with neodymium dome
Housing:	Polypropylene and mica cone with butyl surround
Connection type:	4 Spring loaded gold plated speaker wire jackets for solid connection
Crossover:	12 dB/Octave between tweeters and woofer
Features:	Easy to install Heavy duty construction Magnetic grille may be painted to complement decor Humidity resistant
Dimensions:	9.25" x 9.25" x 3.5" (23.5cm x 23.5cm x 8.9cm) (WHD)

Speakers



IN-CEILING SPEAKERS

PL-C60 / PL-C60ST

6.5" In ceiling 2-way speaker



Max power:	60 W
Frequency response:	60Hz / 20kHz \pm 10dB
Sensitivity:	91 dB
Nominal dispersion:	120
Impedance:	8H (70V: 3.8, 7.5, 15, 30, 60W), (100V: 7.5, 15, 30, 60W)
Minimum impedance:	6.9H @ 250 Hz
Woofer:	6.5" (16.5cm) paper cone, 1.2" (3cm) copper coil on aluminum bobbin
Tweeter:	2" (5.1cm) Soft dome neodymium, 0.8" (2cm) copper coil on aluminum bobbin
Housing:	Polyester insulation, rubber surround
Connection type:	Removable screw connectors
Max wire gauge:	13 AWG
Features:	Designed for multiple applications in commercial or industrial location Weather resistant Solid bracket for wall or ceiling mounting Built-in transformers allows for use in 8 ohm or 70 V network PL-C60ST includes ceiling tile supports

PL-S80 / PL-S80B

Commercial 8" metal ceiling speaker



Power handling:	10 W
Magnet weight:	10 oz.
Features:	A very competitive commercial ceiling speaker 8" (20.3cm) speaker with whizzer cone 15 w 70 volt transformer with different taps: 10, 5, 2.5, 1.25 watts Can also be used as 8 ohms when connected directly at the speaker Designed for ceiling mount with or without railing Rails not included (AR-62) Easy to install White semi-gloss finish, can be painted to match any décor
Dimensions:	8" x 4.5" x 8" (20.3cm x 11.4cm x 20.3cm) (WHD)
	* Available without back box (PL-S80) or with back box (PLS80B)

Speakers

IN-CEILING SPEAKERS



PL-P60B / PL-P60W

Open ceiling hanging speaker

PROLOGUE



Max power:	80 Watts RMS
Frequency response:	45 Hz - 20 kHz, - 10 dB
Sensitivity:	90 dB
Impedance:	8H (70V: 32, 16, 8, 4, 2, 1W), (100V: 32, 16, 8, 4, 2, 1W)
Woofer:	6.5" (16.5cm) with 1.2" (3cm) voice coil
Housing:	Injection molded ABS
Termination type:	4 Pin terminal block
Features:	Hanging hardware included Available in black (PL-P60B) or white (PL-P60W)
Dimensions:	12.2" x 15" (30.1cm x 38.1cm) (WH)
Weight:	9.92 lbs (4.5 kg)



AS-40

Indoor/Outdoor Horn Speaker



Frequency response:	400 Hz – 6000 Hz
Features:	High intelligibility requiring minimum space Adjustable mounting bracket Pre-assembled ABS construction White color
Adjustable power level:	30 W, 15 W, 7.5 W, 3.8 W at 8 ohm or 70 V
Dimension:	11.2" x 11" x 10"
Weight:	1.8 kg

Speakers



ACCESSORIES

AR-05

Metal Round grill to be mounted on 8" speaker
White finish
Commercial grade



AR-06

Square metal grill to be mounted on 8" speaker
White finish
Commercial grade



AR-08

Round metal ceiling back box
Designed to be mounted behind an AR-05 grille
Commercial grade



AR-09

Square metal ceiling back box
Designed to be mounted on the back of an AR-06 speaker grille
Commercial grade




AR-13

Square back box for the AR-06 speaker grille
Surface mounted on the wall or ceiling
White finish
Commercial grade




AR-62 individually

Mounting Rails Ceiling Speakers
Mounting rails to reinforce suspended ceilings for mounting speaker enclosures
Will prevent sagging of ceiling tile or gypsum

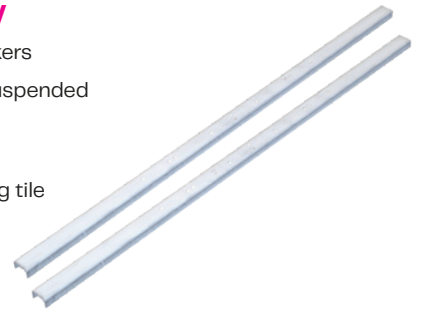

PL-CTS60

Support à haut-parleur pour plafond suspendu, conçu pour les PL-C60

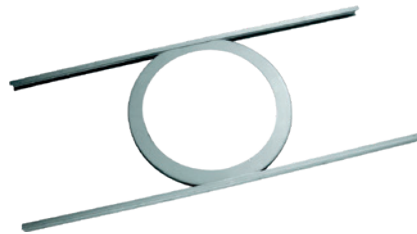

Speakers

REPLACEMENT PARTS



AR-40

Horn Driver 60 watts, 16 ohms



Power:	60 Watts
Frequency response:	150 – 600 Hz
Dimensions:	11.4 cm x 11.2 cm
Weight:	1.65 kg
Features:	The driver unit is die cast aluminum Suitable as a replacement driver (16 ohms) for use with standard 1-3/8" – 18 male thread horns Highly articulate sound in most harsh environments

AS-06

Mid-Range replacement



Type:	Mid-Range
Size:	4"
Frequency Response:	400 – 10 Hz
Impedance:	8 Ohms
Sensitivity:	94 dB
Magnet weight:	3 oz.
Power rating:	20 Watts RMS

AS-11

Replacement Full Range drive unit



Type:	Full Range / Dual Cone
Size:	6"
Sensitivity:	90 dB
Frequency Response:	70 Hz – 15 kHz
Impedance:	4 Ohms
Magnet weight:	10 oz.
Power rating:	45 Watts RMS

Speakers

IN-WALL WIRES



FW-12-R2C5

In-wall speaker wire

Wire gauge: 12 AWG
Conductors: 2
Colour: Yellow
Length: 152 m (500')
Rated: CSA FT4



FW-14-R2C / FW-14-R2CW

In-wall speaker wire

Wire gauge: 14 AWG
Conductors: 2
Colour: Blue / White
Length: 152 m (500')
Rated: CSA FT4



FW-16-R2CB (CB5) FW-16-R2CW (CW5)

In-wall speaker wire


Wire gauge: 16 AWG
Conductors: 2
Colour: Black / White
Length: CB / CW: 305 m (1000')
CB5 / CW5: 152 m (500')
Rated: CSA FT4



FW-16-R4CB / FW-16-R4CW

In-wall speaker wire

Wire gauge: 16 AWG
Conductors: 4
Colour: Black / White
Length: 152 m (500')
Rated: CSA FT4



FW-18-R4CB / FW-18-R4CW

In-wall speaker wire

Wire gauge: 18 AWG
Conductors: 4
Colour: Black / White
Length: 300 m (1000')
Rated: CSA FT4



Speakers

SURFACE WIRES



FW-12-TT

Surface speaker wire

Wire gauge: 12 AWG
Conductors: 2
Colour: Clear
Length: 152 m (500')
Rated: PVC not rated



FW-16-TC

Surface speaker wire

Wire gauge: 16 AWG
Conductors: 2
Colour: Clear
Length: 152 m (500')
Rated: PVC not rated



Volume Controls



PRODUCT SPECIFICATION

AR-45

4 Pairs Stereo Speaker
Distribution System



Power handling: 70 Watts RMS

Features: Can be operated individually or combined

Separate left and right ground paths for compatibility with all amps, even bridged

Optional Internal impedance adaptor with switch to keep impedance constant at the amplifier

Push-to-connect terminal accepts up to 14 gauge wires

Steel chassis and top cover, ABS faceplate

Dimensions: 216mm x 112mm x 49mm (WDH)

AR-47

12 Pairs Stereo Speaker
Distribution System



Power handling: 300 Watts per channel (peak power)

Features: Selectable A/B amplifier inputs

Adjustable impedance control

Independent channel grounds for safe connection to all amplifiers (including bridged or floating ground)

Suitable for use with 4 or 8 ohm inputs

Heavy-duty, removable screw connectors to accept wire up to 12 gauge

Steel chassis and top cover

Dimensions: 432mm x 204mm x 88mm (WDH)

AR-50

6 Pair Stereo Speaker
Distribution System



Power handling: 180 Watts/channel RMS

Features: A/B Selector for two audio sources and switches for each pair of speakers

Speaker select with independent push-on switches and volume control for 6 pairs of speakers

Autoformer impedance matching designed for high quality audio distribution

Low power loss

Push-to-connect terminals handle up to 8 gauge wire for speakers

Separate left and right ground paths for compatibility with all amps, even bridged

Suitable for use with 4 - 8 - 16 ohms inputs

Steel chassis and top cover

Dimensions: 430mm x 150mm x 56mm (WDH)

Weight: 4.5 kg

Volume controls



PRODUCT SPECIFICATION

PL-VC10 W / PL-VC10 SS

Rotary volume control for 70 V
Speaker distribution network

PROLOGUE



Power handling:

10 Watts RMS

Features:

Removable captive screw connecting block

10 step attenuator

Commercial grade

24 V Override Relay

Fits standard single gang box

Available in white Decora style (PL-VC10W) or stainless steel (PL-VC10SS) finish

PL-VC100 W

Rotary volume control for 70 V
Speaker distribution network

PROLOGUE



Power handling:

100 Watts RMS

Features:

Removable captive screw connecting block

10 step attenuator

Commercial grade

24 V Override Relay

Fits standard single gang box

Available in white Decora style (PL-VC100W)

Amplifiers



PRODUCT SPECIFICATIONS

RS-200

Compact Audio Mixer
with Karaoke Function



Frequency Response:	20 Hz - 20 kHz
Inputs:	2 6.3 Hi Z Microphone inputs One AUX stereo
Output:	Aux level Stereophonic
Power Source:	12 V DC. AC adaptor supplied
Features:	Basic audio mixer for simple applications Karaoke function
Dimensions:	6.3" x 3.9" x 2" (WDH)
Weight:	0.16 kg

SA-15

Mobile Amplifier



Power Output:	15 Watts RMS (Monophonic)
Frequency Response:	100 Hz - 20 kHz
Inputs:	1 Microphone 1 1/4" AUX
Output Impedance:	8 Ohms
Power Source:	12 V DC
Features:	Compact high efficiency portable PA amplifier Integrated fog horn and siren sound effects Installation hardware included Created for outdoor presentation, cars, buses and boats
Dimensions:	6.2" x 6.3" x 2.9" (WDH)
Weight:	0.8 kg

Amplifiers

PRODUCT SPECIFICATIONS



SA-30

Desktop Commercial
Mixer Amplifier



Power Output:	30 Watts RMS (Monophonic)
Frequency Response:	100 Hz - 18 kHz \pm 3dB
Inputs:	2 Microphone (1 Priority function) 1 AUX/CD Telephone paging input
Output Impedance:	4 Ω , 8 Ω , 16 Ω , 70 V/100 V
Power Source:	117 V AC, 12 V DC
Features:	Automatic priority paging on microphone input Telephone paging input Preamplifier can be separated from the amplification section allowing the use of an external mixer Two band equalizer
Dimensions:	12.6" x 7.5" x 3.1" (WDH)
Weight:	5 kg

Amplifiers

PRODUCT SPECIFICATIONS



SA-65

Multi-Purpose Commercial Amplifier



Power Output:	60 Watts RMS (Monophonic)
Frequency Response:	80 Hz - 16 kHz (± 3 dB)
Inputs:	3 Programmable Microphone XLR : MIC/Line/ Phantom exchange SW 1 AUX/RCA
Controls:	1 AUX, 1 Master 2 Treble/Bass 3 Input volume controls Telephone/Monitor function Output Impedance: 4 Ω , 70 V, 100 V
Power Source:	115 V AC, 24 V DC for external use
Features:	Integrated mixer Music on hold output for telephone system Telephone paging input muting the AUX input
Dimensions:	16.5" x 10.2" x 3.5" (WDH)
Weight:	7.6 kg

SA-6120S

Desktop Mixer Amplifier



Power Output:	120 Watts RMS (Monophonic)
Frequency Response:	20 Hz - 20 kHz
Inputs:	4 Balanced XLR microphone inputs with switchable phantom power and AUX level position 1 AUX RCA stereo input 1 Preamplifier out, 1 main in Telephone paging input
Output Impedance:	8 Ω (25 V), 70 v, 100 V
Power Source:	110 V AC
Features:	Music on hold output Mic with soft mute priority 4 zones output with individual volume controls and on/off switch Treble and bass controls LED VU-meter
Dimensions:	16.9" x 11.6" x 3.9" (WDH)
Weight:	9.64 kg



OTHERS

AA-53

Digital to Analog
Audio Converter



Input:	Fiber optic or digital coax cable
Output:	Analog stereo audio
Power Source:	AC adaptor
Features:	Converts coaxial or Toslink digital audio signals to analog L/R audio Supports sampling rate at 32, 44.1, 48 and 96 KHz 24-Bit S/PDIF incoming bit stream on left and right channels Electromagnetic noise-free transmission Easy to install and operate

AP-25

Stereo Turntable Preamp



Frequency Response:	20 Hz - 20 kHz
Input:	25 mv
Output:	350 mv
Power Source:	AC adaptor
Features:	Audio preamplifier designed to increase signal from magnetic cartridge to AUX input level



SX-100

Desktop Stereo Mixer



Frequency Response:	20 Hz - 20 kHz
Inputs:	3 Balanced microphone inputs AUX/CD and Phono
Outputs:	Headphone output on cue and mixed signal Preamplifier output and Master output
Power Source:	110 V AC
Weight:	1.63 kg
Features:	Echo control on each channel Cueing option on 4 inputs 3 band EQ and signal function LED display Very compact design
Dimensions:	12.6" X 7.7" X 1.8" (WDH)

TU-508

AM/FM Digital Stereo Tuner



Features:	60 preset memories AM or FM Remote control included Rack mount included, extendable to 19» LED Display
Power Source:	120 V AC
Weight:	2.1 kg
Dimensions:	9.4" x 6.8" x 2" (WDH)

Microphones

PRODUCT SPECIFICATION



AM-03

Universal type microphone/headset
Compatible with
computer equipment



AW-214

Wireless microphone set
Includes headset and Lavalier
type microphone
176.3 MHz



AM-31

Vocal/instrumental,
unidirectional microphone
Featuring a cardioid pattern,
it has good feedback rejection,
die cast body to reduce
handling noise
when used on the stage
Convenient on/off switch
Low impedance with 15ft. (5m)
XLR cable



AM-33

Headset replacement microphone
for most wireless systems
To be used with phantom power system
Compatible with most types on the market



Microphones

ACCESSORIES



AM-22 VR

Microphone holder



MD-20

Handheld transmitter microphone holder for any microphone stand



MS-07

Extendable microphone floor stand with round solid metal base



MS-10

Extendable microphone floor stand with tripod leg base
Adjustable from 35" to 63"
Black matte finish



MS-14

Microphone horizontal Boom Arm
31" length



Microphones

CABLES



MC-01

Microphone Cable XLR jack
to 6.3mm plug
15 ft



MC-04

Microphone Cable XLR jack
to 6.3mm plug
20 ft.



MC-08

Microphone Cable XLR plug
to 6.3mm plug
6 ft.



MC-10

Microphone Cable XLR
plug to XLR jack
15 ft.



MC-12

Microphone Cable XLR plug
to XLR jack
25 ft.



MC-14

Microphone Cable XLR
plug to XLR jack
50 ft.



Microphones

CABLES



MC-16

Microphone Cable XLR
plug to XLR jack
75 ft.



MC-31

Microphone Patch Cable 6.3mm
plug to 6.3mm plug
12 inches (1ft.)



MC-32

Microphone Cable 6.3mm
plug to 6.3mm plug
10 ft.



MC-33

Microphone Cable 6.3mm
plug to 6.3mm plug
6 ft.



MC-34

Microphone Cable 6.3mm
plug to 6.3mm plug
15 ft.



MC-35

Microphone Cable 6.3mm
plug to 6.3mm plug
20 ft.



MC-36

Microphone Cable 6.3mm
plug to 6.3mm plug
25 ft.



MC-43

Microphone Cable 6.3mm
plug to RCA plug
6 ft.



Audio installation



ACCESSORIES

A-LV1

Low voltage brackets

Designed to mount wall plates flush, for a better-looking, easy to install job

Features specially designed screw holes, thin front lip and more

Horizontal or vertical mounting

Single gang box

Plastic

UL/CSA listed



A-LV2

Low voltage brackets

Designed to mount wall plates flush, for a better-looking, easy to install job

Features specially designed screw holes, thin front lip and more

Horizontal or vertical mounting

Double gang box

Plastic

UL/CSA listed



A-LV3

Low voltage brackets

Designed to mount wall plates flush, for a better-looking, easy to install job


Features specially designed screw holes, thin front lip and more

Horizontal or vertical mounting

Triple gang box

Plastic

UL/CSA listed



A-LV4

Low voltage brackets

Designed to mount wall plates flush, for a better-looking, easy to install job

job


Features specially designed screw holes, thin front lip and more

Horizontal or vertical mounting

Quadruple gang box

Plastic

UL/CSA listed



Audio installation



ACCESSORIES

A-LVN1

Low voltage mounting bracket



Designed for the installation of low voltage class 2 wiring for wall plates and volume controls

These mounting brackets offer a fast, easy and cost-effective way to install wall plates in new constructions

To be nailed to wood frame

Single gang electrical box

A-LVN2

Low voltage mounting bracket



Designed for the installation of low voltage class 2 wiring for wall plates and volume controls

These mounting brackets offer a fast, easy and cost-effective way to install wall plates in new constructions

To be nailed to wood frame

Double gang electrical box

Audio installation



ACCESSORIES

AR-10

5 Watt line transformer - 70 V



Maximum power handling: 5 watts


Available taps: 0.31 W / 0.62 W / 1.25 W / 2.5 W / 5 W

4/8 Ohm secondary with color coded fly lead taps

Standard mounting

AR-11

10 Watt line transformer - 70V



Maximum power handling: 10 watts

Available taps: 0.62 W / 1.25 W / 2.5 W / 5 W / 10 W

4/8 Ohm secondary with color coded fly lead taps

Standard mounting

IR-10

Infrared Signal Repeater Kit



Complete kit to extend remote control into a different room

Simple to install

Compatible with all types of remote controls

Cables can be extended to 10m (33 ft)

All units can be stored in a closed cabinet

TY25MX

Heavy duty general purpose plastic tie wraps

Length 7.3 inches

50lbs capacity

Weather resistant

1000 pcs

Made by Thomas & Betts



TY26MX

Heavy duty general purpose plastic tie wraps

Length 11 inches

40lbs capacity

Color black with UV protection

1000 pcs.

Made by Thomas & Betts



Audio installation



ACCESSORIES

SA DEC-STRAP-0-WH

Wirepath™ Blank Decorative Strap (White)



SA DEC-STRAP-1-WH

Wirepath™ 1-Port Decorative Strap (White)



SA DEC-STRAP-2-WH

Wirepath™ 2-Port Decorative Strap (White)



SA DEC-STRAP-3-WH

Wirepath™ 3-Port Decorative Strap (White)



SA DEC-STRAP-4-WH

Wirepath™ 4-Port Decorative Strap (White)



SA DEC-STRAP-6-WH

Wirepath™ 6-Port Decorative Strap (White)



Audio installation



ACCESSORIES

WP-56

Metal wall mount plate

Features easy bend fingers to secure onto various thickness wall boards

Great problem solver as this can be mounted almost anywhere in the wall

Extremely cost effective

Single gang



WP-57

Plastic single gang work box

These work boxes are for low voltage devices will simplify installations of wall plates and volume controls

Will fit wall thickness of 1/8" to 1 1/8"

Can be mounted vertically or horizontally, and is completely assembled (no lost or missing screws)

Made of durable PVC plastic, the non-metallic construction eliminates antenna effect

The backless box design accommodates the space and bend radius requirements of coaxial or data/communication cables

Classified for two hour fire resistant wall assemblies



WP-58

Plastic double gang work box

These work boxes are for low voltage devices will simplify installations of wall plates and volume controls


Will fit wall thickness of 1/8" to 1 1/8"

Can be mounted vertically or horizontally, and is completely assembled (no lost or missing screws)

Made of durable PVC plastic, the non-metallic construction eliminates antenna effect

The backless box design accommodates the space and bend radius requirements of coaxial or data/communication cables

Classified for two hour fire resistant wall assemblies



WP-67

Plastic single gang mounting frame

Wall mount plastic single gang mounting frame for wall plates and controls

To be nailed to wood studs

Plastic construction




WP-68

Plastic double gang mounting frame

Wall mount plastic double gang mounting frame for wall plates and controls

To be nailed to wood studs

Plastic construction



Audio installation



ACCESSORIES


WP-69

Plastic triple gang mounting frame

Wallmount plastic triple gang mounting frame for wall plates and controls

To be nailed to wood studs

Plastic construction



WPK-31

Wall plate

Will allow several wires to be fitted inside the wall

Will fit a standard plastic frame, size single gang box

Opening at 45 degree on wall surface

White finish



WPK-32

Wall plate

Will allow several wires to be fitted inside the wall

Will fit a double plastic frame, double gang box

Opening at 45 degree on wall surface

White finish



WPK-33

Wall plate

Will allow several wires to be fitted inside the wall

Will fit a standard plastic frame, size single gang box

Opening at 45 degree inside the wall

White finish



WPK-34

Wall plate

Will allow several wires to be fitted inside the wall

Will fit a double plastic frame, double gang box

Opening at 45 degree inside the wall

White finish



Audio installation



ACCESSORIES

VB-01

Vapor Barrier

Made of thick clear plastic to prevent air infiltration around audio/video wall plates installed on exterior walls

Size compatible with single gang electrical box

Grandeur correspondante à une boîte électrique simple.



VB-02

Vapor Barrier

Made of thick clear plastic to prevent air infiltration around audio/video wall plates installed on exterior walls

Size compatible with double gang electrical box



VB-23

Vapor Barrier

Made of thick clear plastic to prevent air infiltration or dust particle around bathroom fan

Size: 14" x 11"

Grandeur: 14" x 11".



VB-24

Vapor Barrier

Made of thick clear plastic to prevent air infiltration or dust particle around ceiling speakers

Size: 24" x 16" x 7.5"

