


- 120W RMS mono
- 70v and 8 ohm outputs
- 4 microphone / line inputs
- 1 stereo AUX input
- MP3/USB/SD/FM/Bluetooth
- ECHO Function
- High current switching power with class-D amplifier
- 1U Rack

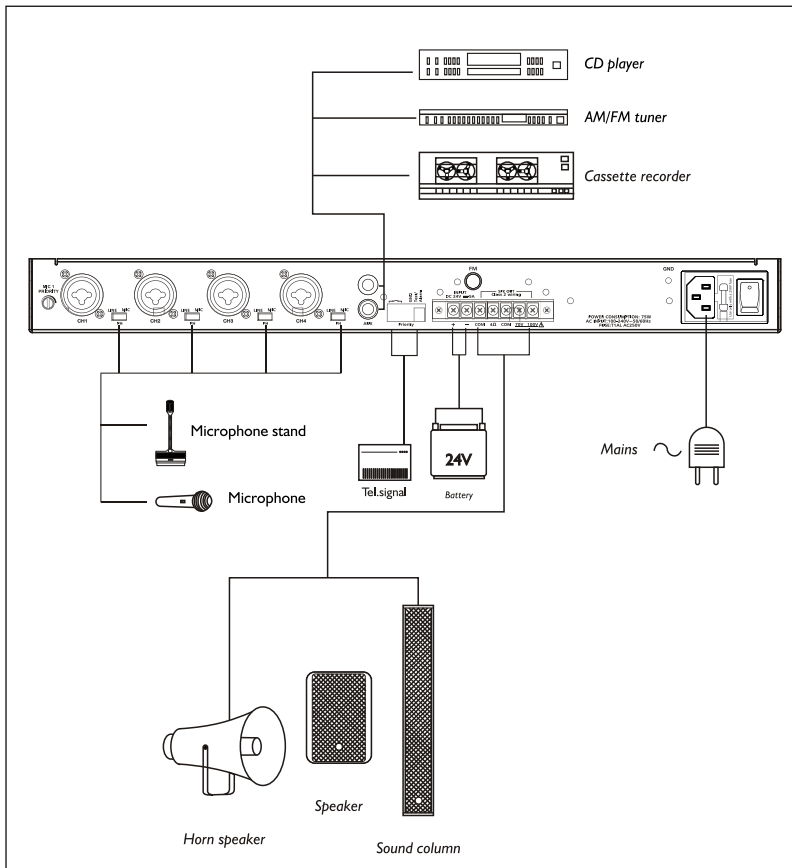

Power supply	AC 100-240V 50/60HZ / DC24V
Power output (1K/70V/100V)	120W(RMS)
Frequency response	80HZ-16KHZ(±3dB)
T.H.D	≤ 1%.
S/N Ratio	Mic: ≥65dB. Phantom: ≥65dB. line: ≥75dB. AUX: ≥75dB.
Input/Sensitivity	Mic: -52dBV balanced. Phantom: -52dBV/18V balanced. line: -10dBV balanced. AUX: -10dBV balanced. Test/alarm: -10dBV balanced.
Equalizer Controls	BASS: ± 10dB(at 100HZ), TREBLE: ± 10dB(at 10KHZ),
Indicators	Pow: Greed led. Sig : Greed led. Pro : Red led. Clip : Red led
Output	COM,4Ω,70V,100V
Controls	4 input volume controls, 1 Aux volume controls. 2 Treble/Bass controls, 1 Master volume control. 4 Mic / phantom / line selector switch. 1. Mic1 Priority controls. MP3 player with SD/USB interface. ECHO function.
Dimensions(W×D×H)	483x281x44mm.
Net weight	4.9KG