

AS-38

Techni
Contact

PROLOGUE

In ceiling type 8" stereophonic speaker boasts a very thin grille held with magnets. A modern design that makes the speaker almost disappear. Excellent frequency response. Separate speaker and tweeter for better results. Double coils on the speaker for stereophonic sources with two adjustable eyeball tweeters. Can be installed in a humid environment with exceptional quality. Four spring loaded gold plated terminals.


Specifications

Mounting hardware included


System type	Ceiling Speaker 8"
Impedance	5.7 ohm
Sensitivity (1w/1m)	88dB
Frequency Response(-10dB)	60Hz~20kHz
Max program power	65W
Max continuous power, RMS	40W
Tap selector	N/A
Low-Frequency voice coil	25.5mm
Crossover Frequency	2.3kHz
Network Type: Low pass	12dB
Network Type: High Pass	18dB
Enclosure Material	ABS
Grille	Steel
Inputs	Push terminals
Colors	Black
Height	116mm
Diameter	281.5mm
Weight	2.1kg
Shipping weight	11.7kg
Packaging	4PCS
Included Accessories	Manual, grille puller
CE:	No
ROHS:	Approved
Transformer tapings	N/A

Graphs and Plots

Frequency Response

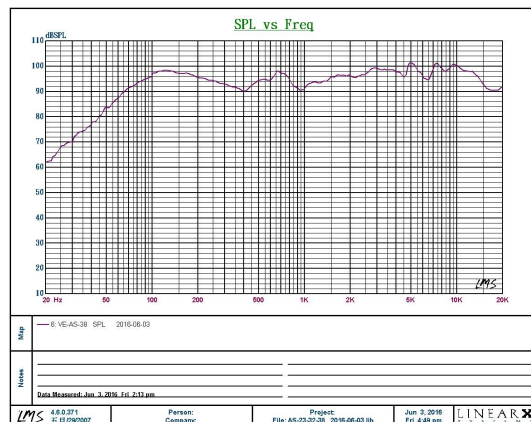

Impedance/Phase

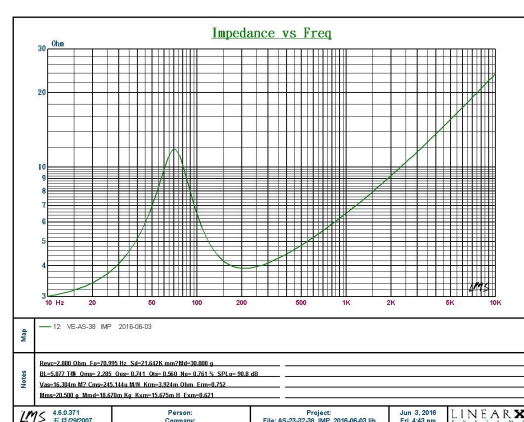

Optional tile bridge: AR-62

